


A UNIFIED APPROACH TO THE DESIGN OF ORBIT FEEDBACK WITH FAST AND SLOW CORRECTORS

S. Gayadeen, M.T. Heron and G. Rehm, Diamond Light Source, UK

CONTROL DIRECTIONS


- For a storage ring with two arrays of correctors (fast and slow), the response matrices are: $R_{slow} = \Phi_s \Sigma_s \Psi_s^T$ and $R_{fast} = \Phi_f \Sigma_f \Psi_f^T$
- The overlap between the controllable subspaces of each matrix can be determined by $\Phi_f^T \Phi_s = \Phi_A \Sigma_A \Psi_A^T$ where $\Sigma_A = \text{diag}\{\cos(\theta_{A_1}), \dots, \cos(\theta_{A_{N_s}})\}$
- The control directions are determined by the angle (θ_{A_i}) between the subspaces:
 - When $\cos(\theta_{A_i}) \approx 1$ the directions are decoupled and the fast and slow controllers are designed independently.
 - When $0 < \cos(\theta_{A_i}) < 1$ either actuator can be used.
 - When $\cos(\theta_{A_i}) = 0$ the control directions almost line up and both fast and slow correctors must be used.
- Mid-ranging control is ideal to determine the control inputs to the two correctors.

CONTROLLER STRUCTURE

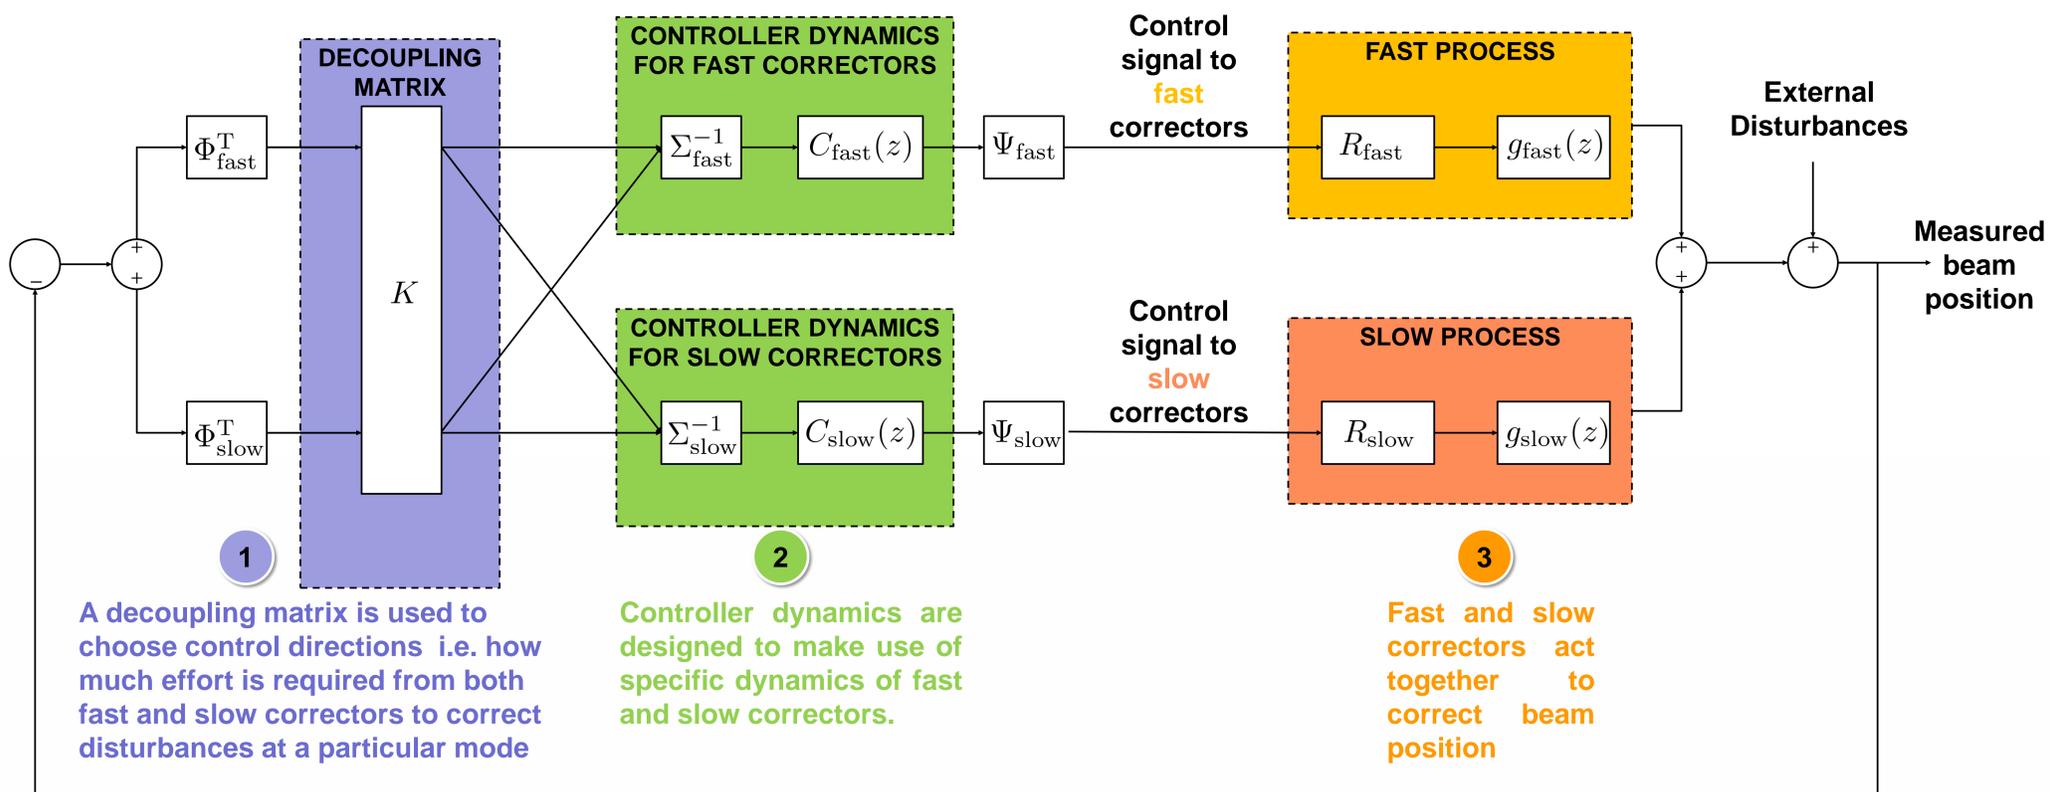

MID-RANGING CONTROL PERFORMANCE

Mid-ranging control manipulates both inputs upon an upset to control electron beam position but then gradually resets or mid-ranges the fast input to its desired setpoint to avoid saturation.

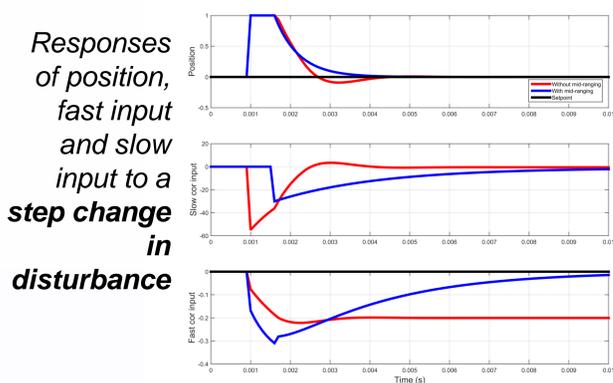


Non-mid ranging:

Fast actuator settles at unknown steady state which may be close to saturation limit and demands more control effort from the slow corrector.

Mid-ranging:

Manipulates the fast corrector first to correct disturbance then uses the slow corrector to ensure that the fast actuator does not saturate by returning it to the zero setpoint.

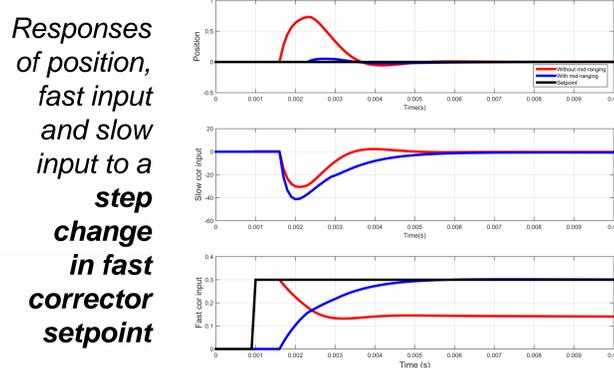


Non-mid ranging:

The effect of changes to the fast actuator and position is not decoupled so any setpoint changes to the fast actuator are observed as a disturbance on position.

Mid-ranging:

The fast actuator achieves the requested setpoint and the effect on the output is decoupled so that changes to the fast actuator setpoint does not affect the output.

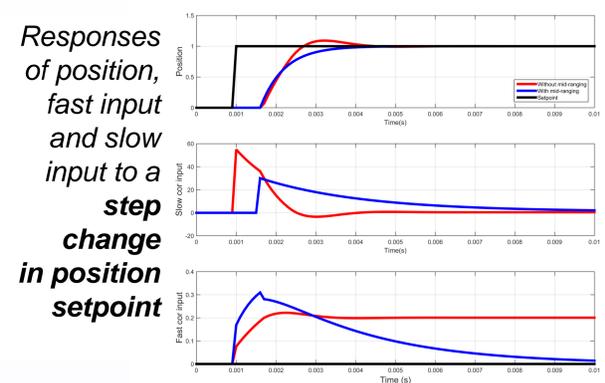

Non-mid ranging:

The position achieves the required setpoint but the fast corrector remains at a steady state which can lead to saturation and requires more effort from the slower actuator.

Mid-ranging:

The fast corrector is returned to its mid-point so that saturation is unlikely and uses less effort from the slow corrector to achieve the new position setpoint.